



10'X4'





BROWN PAPER
DECORATIVE LAMINATES

Make your
space
complete, with
10x4 feet



INTRODUCTION

A 10x4 feet laminate sheet is an excellent choice for various interior applications, offering a blend of durability, versatility, and aesthetic appeal. Its ease of maintenance and installation, coupled with a wide range of design options, makes it a preferred material for both residential and commercial projects.

Engineered with high-quality materials and advanced manufacturing techniques, they offer exceptional durability, scratch resistance, and stain resistance, ensuring that your surfaces maintain their beauty and integrity for years to come.



VENEER

10'X4'



Smoked Binca Pecan
 8097 - VNR

VENEER

10'X4'



Smoked Brosse Pecan
 8098 - VNR



Apex Leaved Elm
8110 - ZO



Narrow Leaved Elm
8111 - ZO

VENEER

10'X4'



Densen Fall Oak
 1529 - VNR

VENEER

10'X4'



Tropical Omto Maple
 9724 - VNR

ZERO OAK

10'X4'



 Dalton Wood
10005 - ZO

ZERO OAK

10'X4'



 Titter Walnut
1528 - ZO

VENEER

10'X4'




 Classic Cedar
 8056 - VNR

ZERO OAK

10'X4'




 Sapped Walnut
 1474 - ZO

VENEER

10'X4'




 Denver Walnut
 1675 - VNR

ZERO OAK

10'X4'




 Majestic Wood
 1482 - ZO

ZERO OAK

10'X4'



 Majestic Oak
1668 - ZO

VENEER

10'X4'



 Russel Gris
8100 - VNR



Our laminates design welcomes you with its warm hues and natural texture. The strategic use of vertical and horizontal lines adds depth and dimension, making it a perfect choice for creating cozy, intimate spaces. The interplay of shadows and light brings the laminate to life, offering a dynamic yet calming visual experience.

ZERO OAK

10'X4'



Malaysian Wood
9720 - ZO

VENEER

10'X4'




 Fresco Pine
 1496 - VNR

ZERO OAK

10'X4'




 Natural Teak
 9400 - ZO



Australian Walnut
10015 - ZO



Riva Mille
10012 - ZO

VENEER

10'X4'



Havel Pearwood
 8113 - VNR

VENEER

10'X4'



Columbian Ashwood
 8109 - VNR

VENEER

10'X4'



American Fresco
 5255 - VNR

VENEER

10'X4'



Douglas Fresco
 5254 - VNR

SLATE


10'X4'



Tremble Marble
1520 - SLA

SLATE

10'X4'

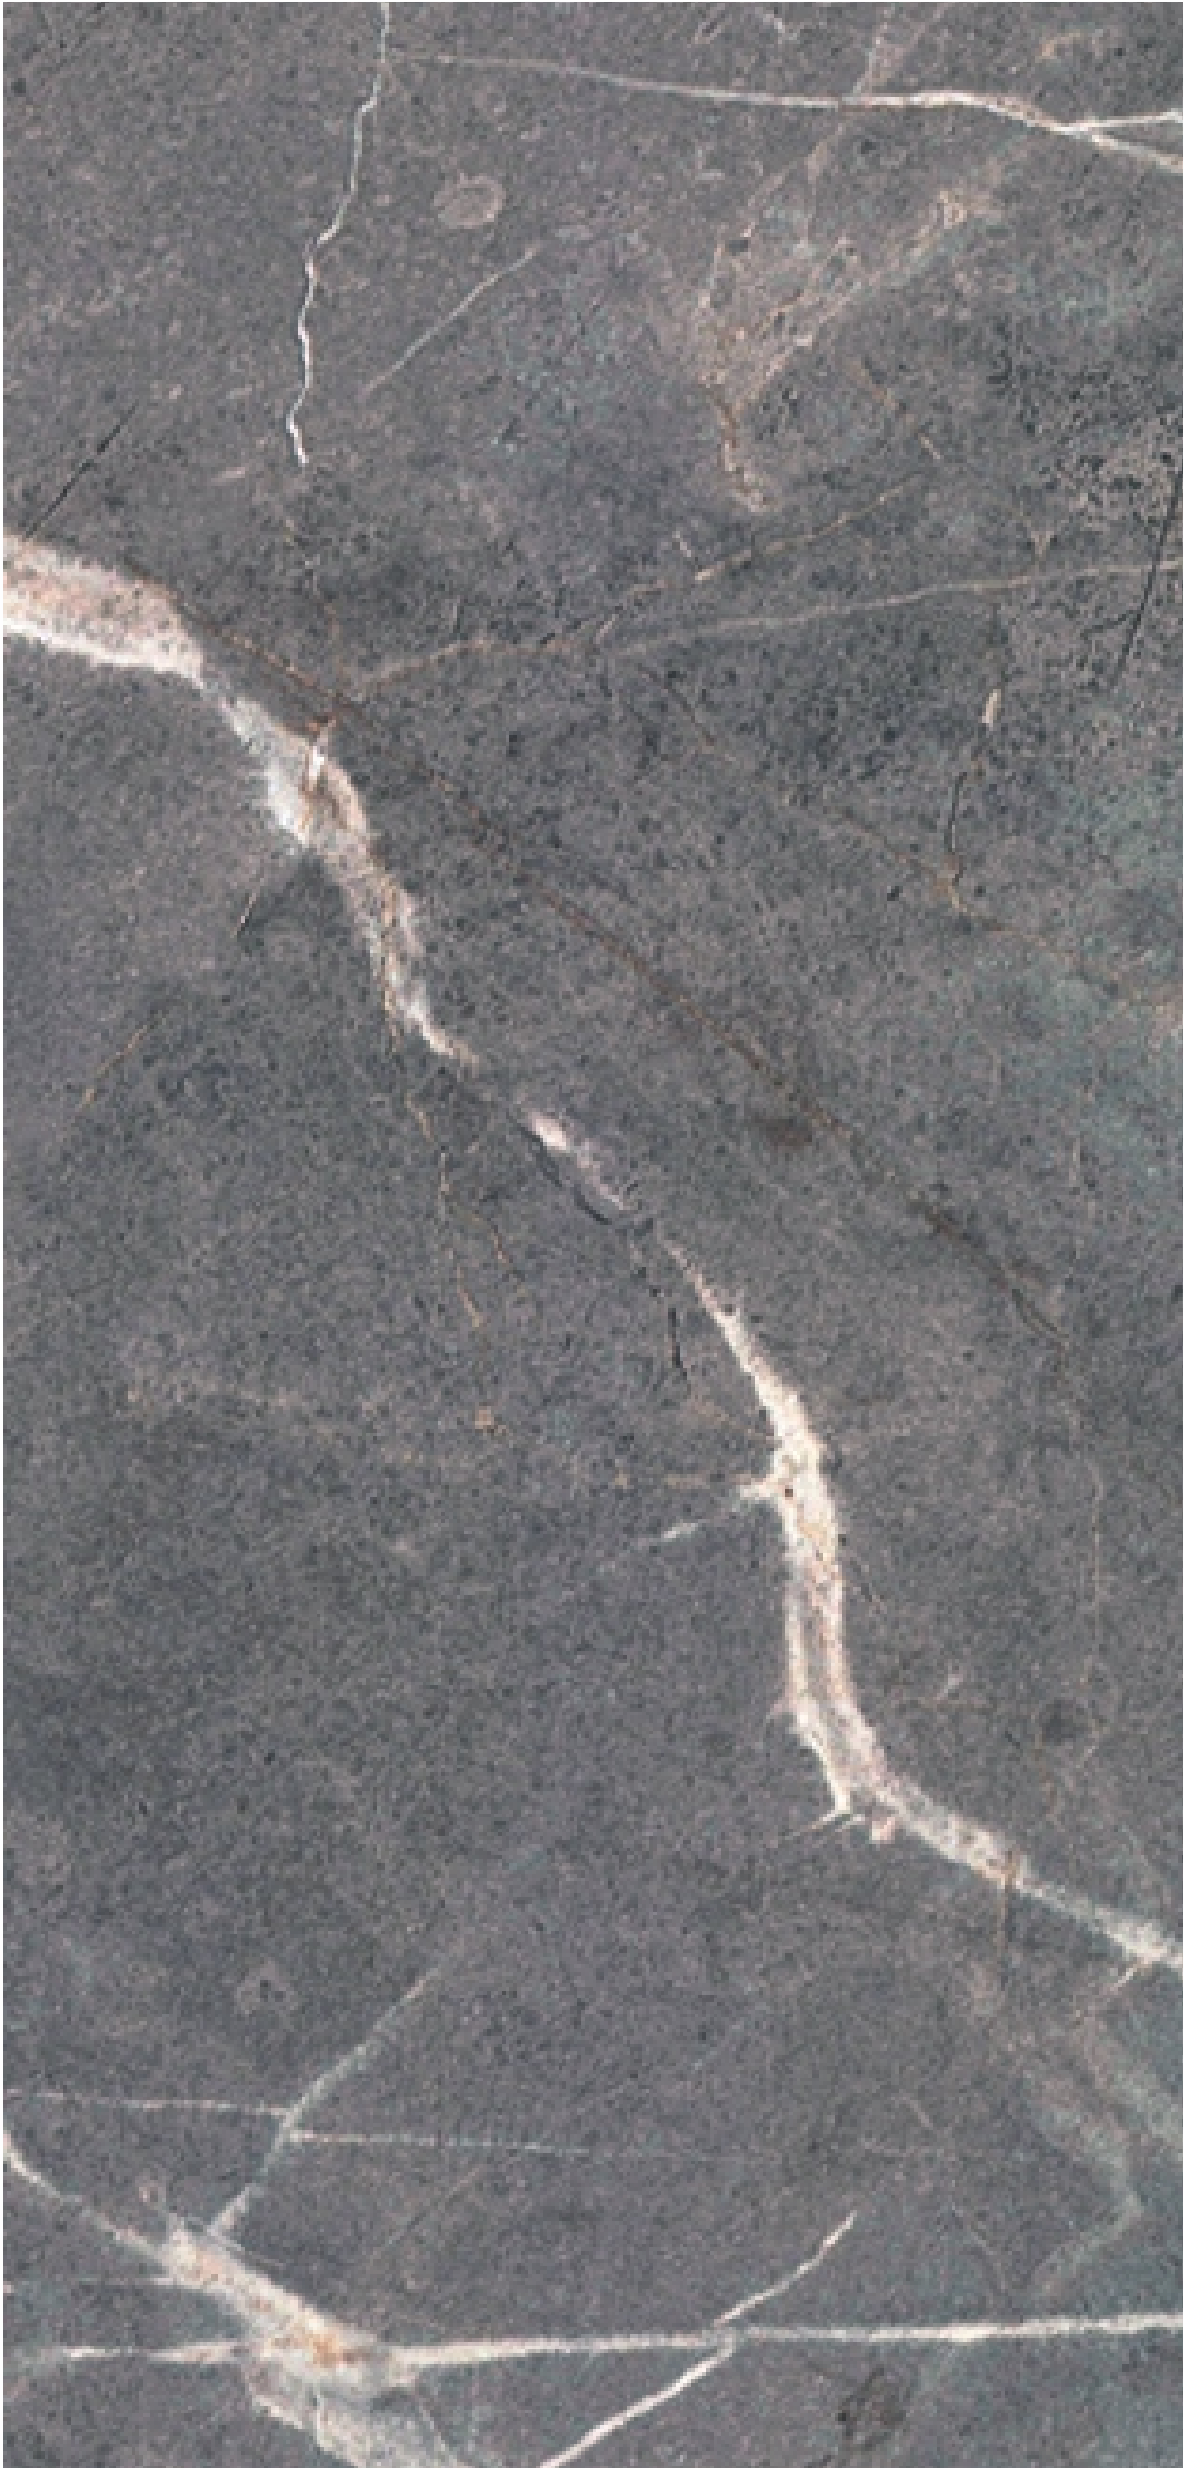

Stagger Marble
1521 - SLA

SLATE

10'X4'



Hard Travertine
9779 - SLA

ULTRA MATT

10'X4'



Satvario Daino
1490 - UM

HIGH GLOSS


10'X4'



 Satvario Daino
1490 - HG

HIGH GLOSS

10'X4'

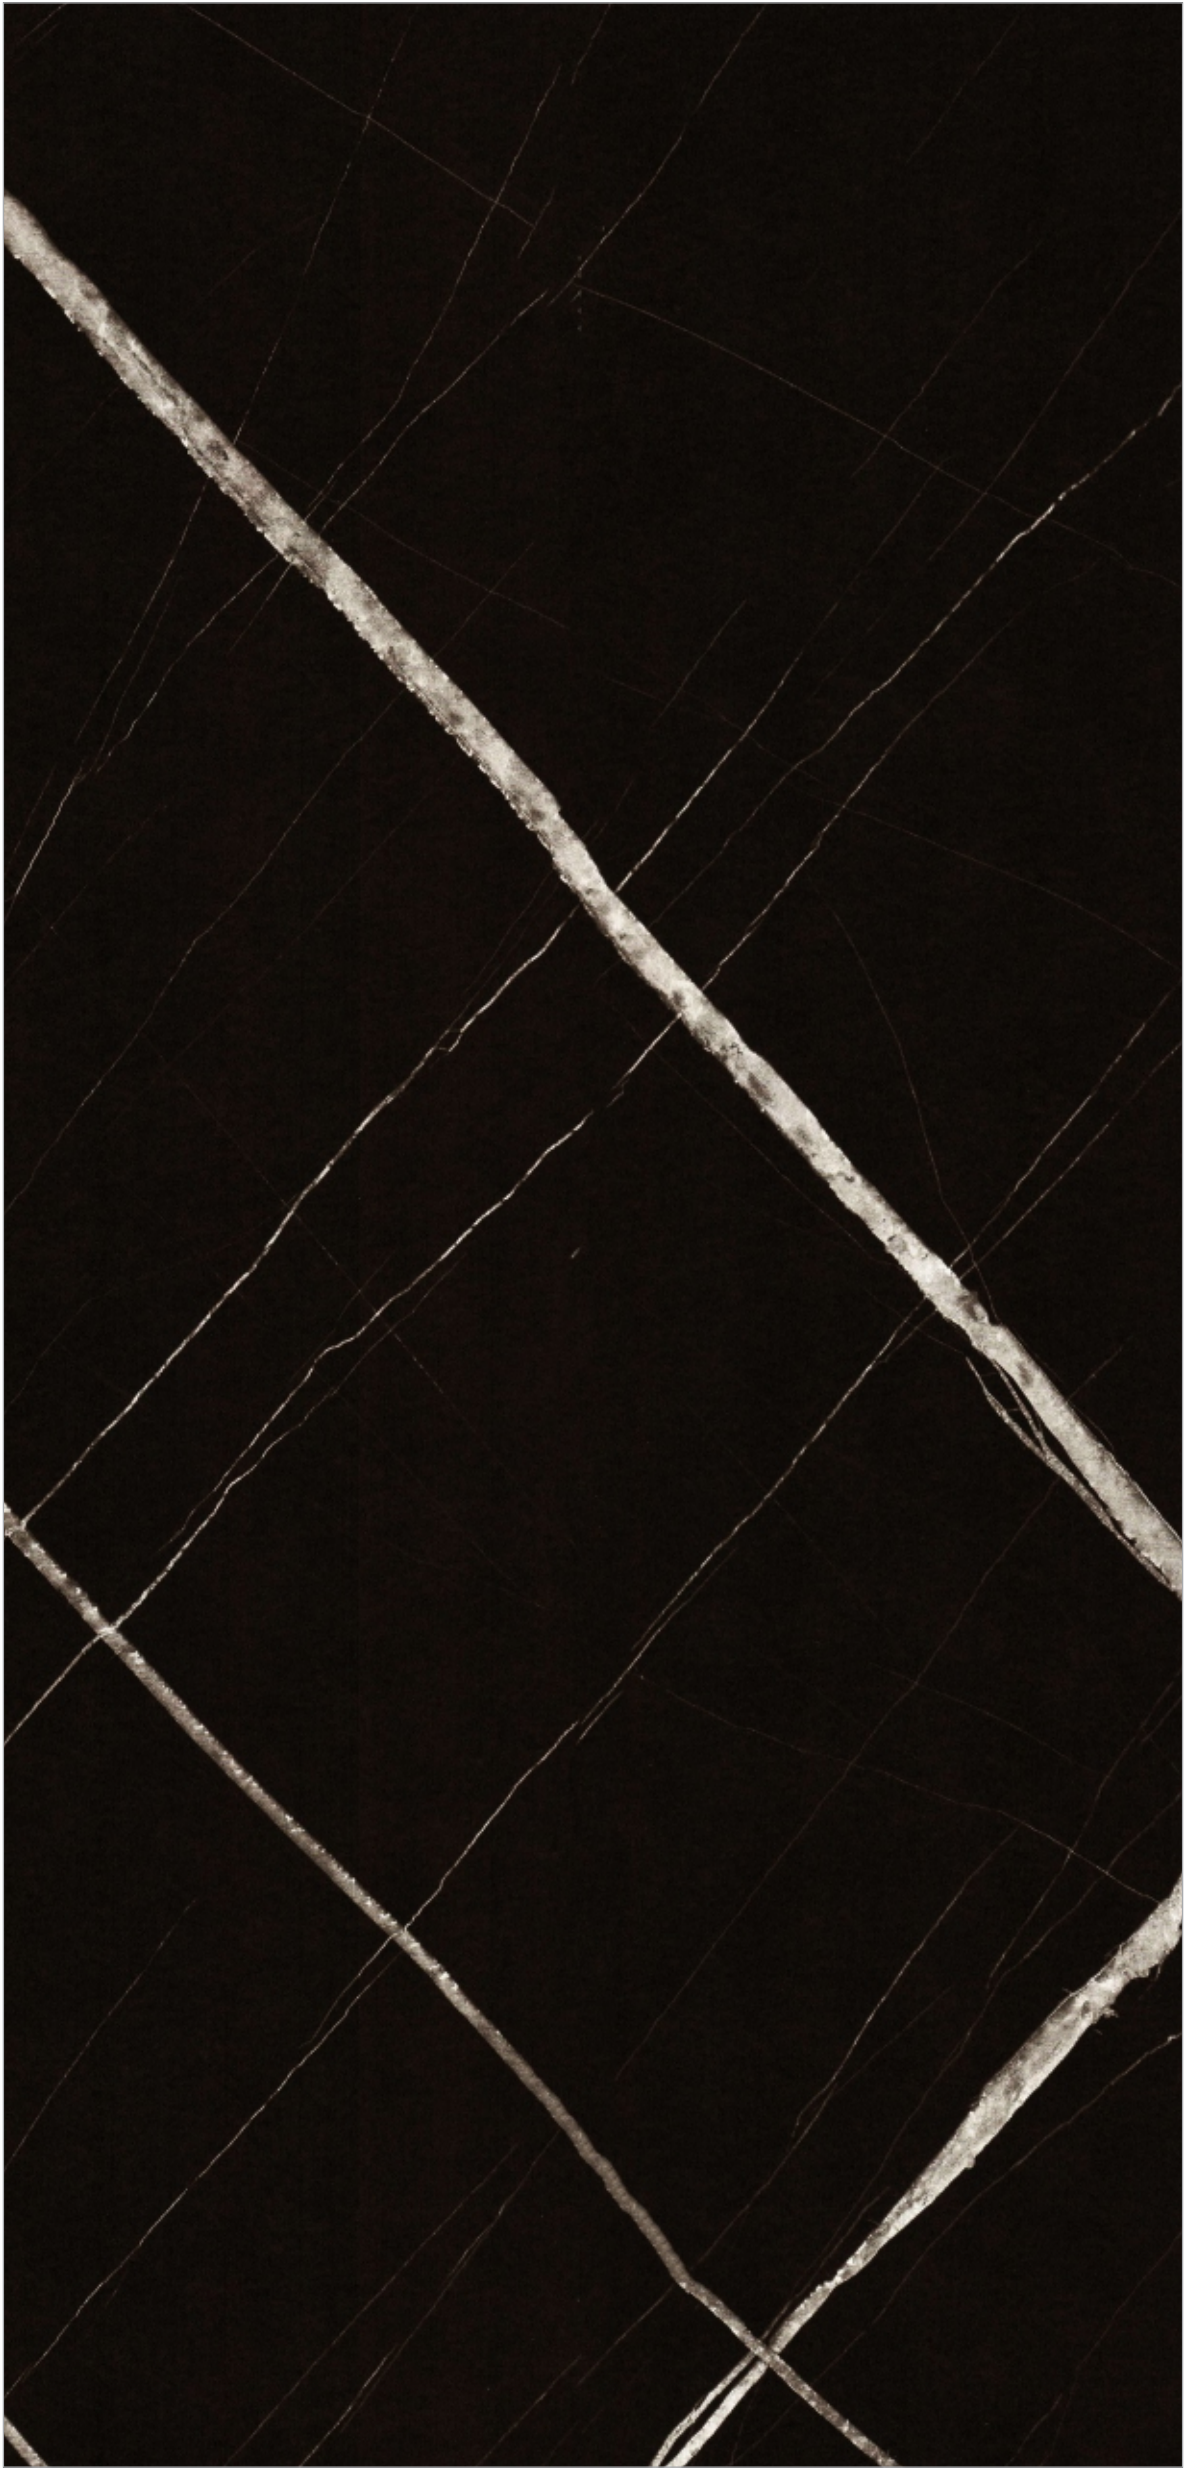

 Naro Marmo Stone
1493 - HG

SUEDE FINISH

10'X4'



 Classic Cedar
8056 - SF

SUEDE FINISH

10'X4'



 Natural Teak
9400 - SF

SUEDE FINISH

10'X4'



Smoked Brosse Pecan
8098 - SF

SUEDE FINISH

10'X4'



Smoked Binca Pecan
8097 - SF

SUEDE FINISH

10'X4'



American Fresco
5255 - SF

SUEDE FINISH

10'X4'



Columbian Ashwood
8109 - SF



COMING
SOON

SR. NO.	DESIGN NO.	FINISH	PAGE NO.
1	1474	ZO	10
2	1482	ZO	12
3	1490	UM	28
4	1490	HG	29
5	1493	HG	30
6	1496	VNR	17
7	1520	SLA	25
8	1521	SLA	26
9	1528	ZO	8
10	1529	VNR	5
11	1668	ZO	13
12	1675	VNR	11
13	5254	VNR	24
14	5255	VNR	23
15	5255	SF	35
16	8056	VNR	9
17	8056	SF	31
18	8097	VNR	1

SR. NO.	DESIGN NO.	FINISH	PAGE NO.
19	8097	SF	34
20	8098	VNR	2
21	8098	SF	33
22	8100	VNR	14
23	8109	VNR	22
24	8109	SF	36
25	8110	ZO	3
26	8111	ZO	4
27	8113	VNR	21
28	9400	ZO	18
29	9400	SF	32
30	9720	ZO	16
31	9724	VNR	6
32	9779	SLA	27
33	10005	ZO	7
34	10012	ZO	20
35	10015	ZO	19

The following precautions should be taken while sticking the laminate

- While installing laminate sheets, check that the color and design of all the sheets is the same.
- Use extreme caution when installing a large piece of laminate sheet.
- There is a possibility of CRACK if the laminate sheet is cut and pasted at 90°
- Use only high quality adhesive.
- There is a possibility of coming Bubbles on laminate sheets in places of excessive moisture.
- While sticking the laminate sheet, there is a possibility of the sheet opening due to low pressure.
- Minimize the use of laminate sheets in the direct sunlight, it can fade the colors.
- While maintaining the laminate sheet, do not use any kind of chemical substance on it.
- Cover the furniture while painting the house. Keep the roll of laminate sheet open.
- Cut the laminate sheet by keeping it straight.
- Tape at maximum space, use (masking Tape)

By keeping the above precautions in mind, many problems will automatically be solved by using laminate.

FINISH	CODE	STYLE
A-118	VNR	VENEER
A-198	ZO	ZERO OAK
A-14	SLA	SLATE
A-8	HG	HIGH GLOSS
SF	SF	SUEDE FINISH
A-155	UM	ULTRA MATT

TECHNICAL SPECIFICATION

Properties	Unit	Specified value as per IS	Observed Typical Value
		2046:1995	
		Type S,HGS	
Thickness	mm	1 MM ± 0.10MM	1 MM
Length	mm	3050mm + 10mm/-0mm	3051
Width	mm	1220 mm + 10mm/-0mm	1222
Resistance to surface wear	Revolution	350 (Min.)	400
Resistance to dry Heat	Grade	Not worse than 4	5
Resistance to immersion in boiling water			
a) Mass increase	%	12.0 (Max.)	6.85
b) Thickness increase	%	14.5 (Max.)	7.73
c) Appearance	Grade	Not worse than 4	5
Dimensional stability at deviated temperature			
a) Longitudinal	%	0.67 (Max.)	0.26
b) Transverse	%	1.15 (Max.)	0.53
Dimensional stability at 20 C			
a) Longitudinal	%	0.42 (Max.)	0.18
b) Transverse	%	0.70 (Max.)	0.28
Resistance to impact by small diameter ball	Newton	20 (Min)	25
Resistance to cracking	Grade	Not worse than 4	5
Resistance to scratching	Newton	2.0 (Min.)	2.5
Resistance to staining			
a) Group 1 & 2	Grade	Not worse than 5	5
b) Group 3 & 4		Not worse than 4	5
Resistance to colour change			
a) In Xenon arc light	Grade	Not worse than 6	6
b) In enclosed Carbon arc light		Not worse than 5	5
Resistance to steam	Grade	Not worse than 4	5
Appearance	-----	Should be free from foreign particle	complies