





DOPPIO ACRILICO

ABOUT OUR PRODUCT

Doppio Acrilico Panels often referred to as doppio panels, are designed with features that include water resistance, light transmission, and reflection. "Doppio" means double in Italian, indicating the double-sided nature of the panels. This provides a symmetrical appearance and can be used in partitions or as decorative elements where both sides are visible. Applications for double-sided Doppio panels include architectural features, interior partitions, decorative panels, and functional elements in various settings. They offer a combination of durability, aesthetic appeal, and practicality. This is introducing our newest collection of timeless innovation. Doppio panels is to beautify your indoor places. Available in multiple designs same texture on both sides.

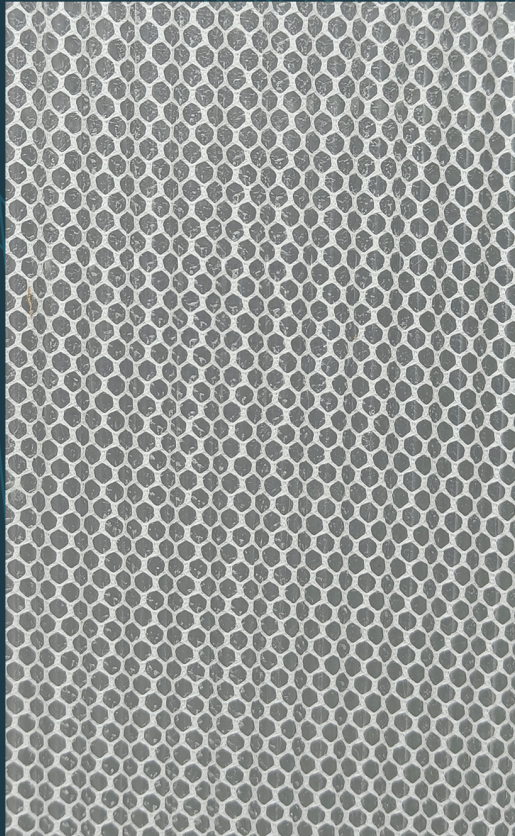


DP-006

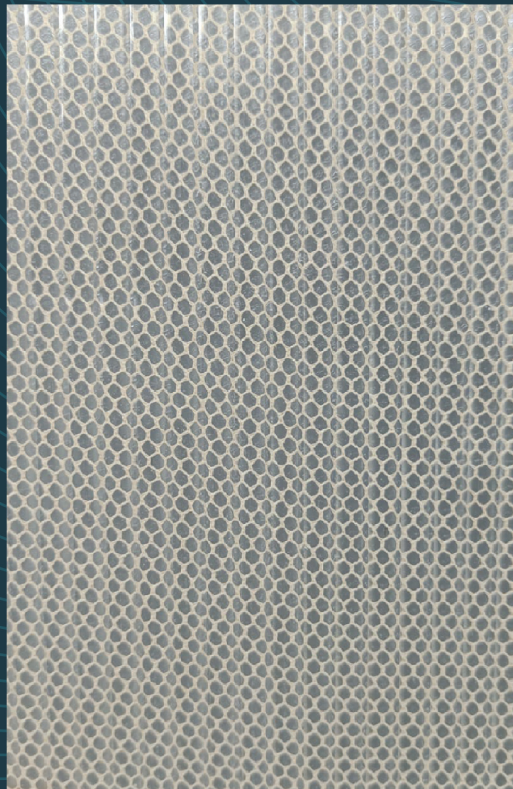

DP-007



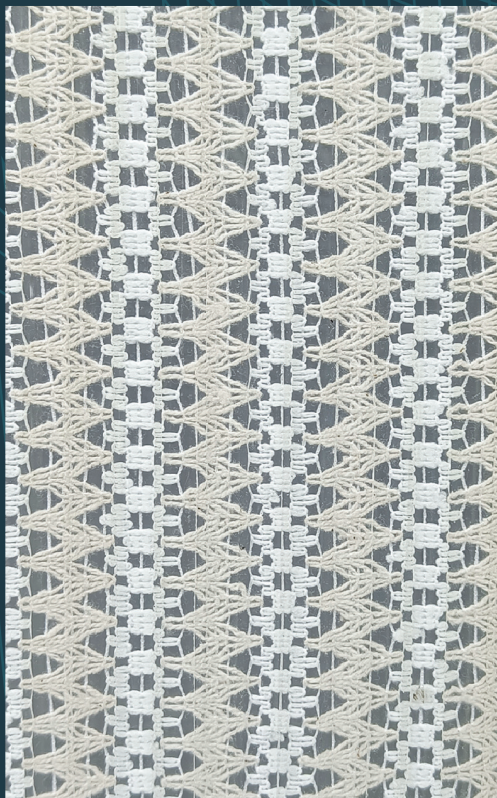


DP-009




DP-010



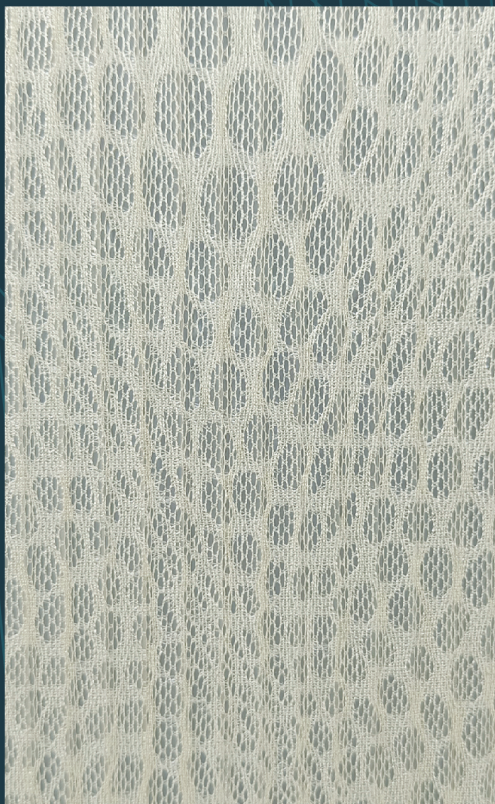


DP-011

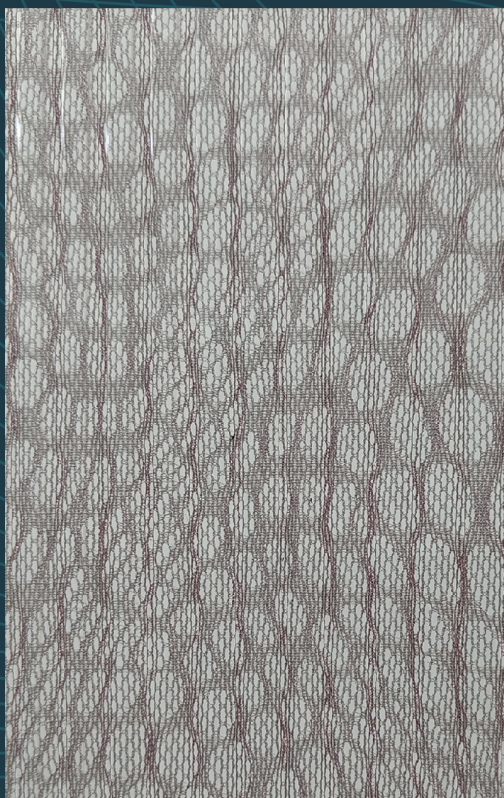

DP-012



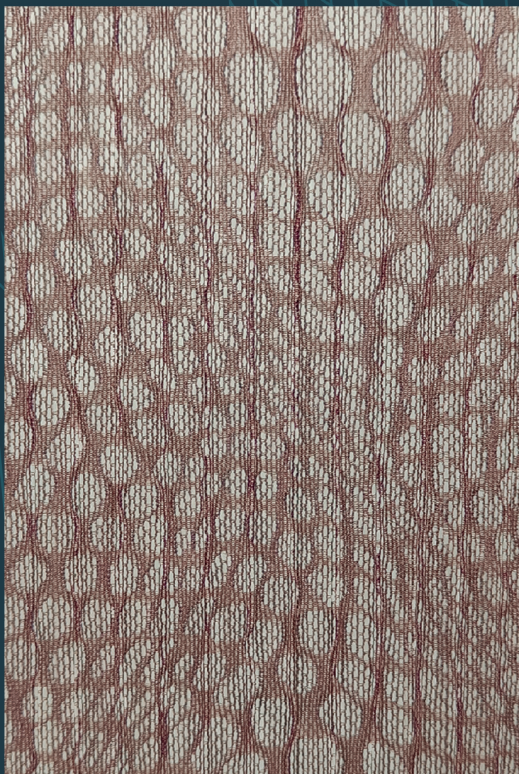

DP-013



DP-017






DP-018



DP-019



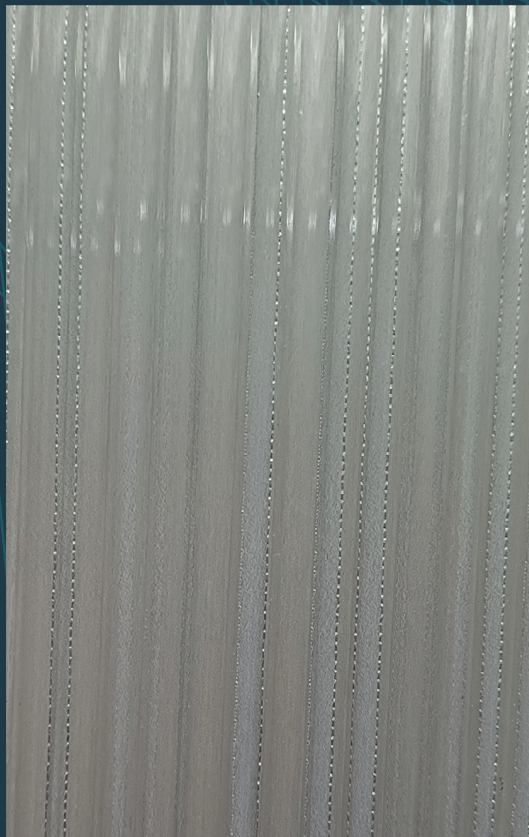

DP-021



DP-026





DP-027




DP-028





DP-029

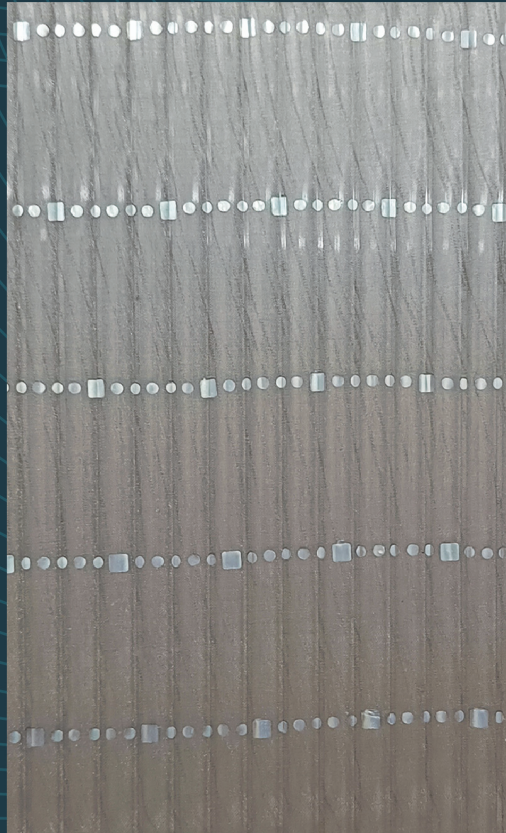

DP-030





DP-031



DP-032





DP-033



Features & Benefits :-

1. Scratch resistant




3. Anti UV



5. Huge resistance to impact




2. Anti glare



4. Environment friendly



6. Non brittle like glass




7. Better properties than toughened glass



9. Wash and dry. Completely waterproof



11. 92% light transmission




13. Only product in its category


8. Stain resistant



10. Easy to cut and install



12. High temperature resistance



• Applications

1. Wardrobes
 2. Sliding wardrobes
 3. Kitchen cabinets
 4. Crockery unit
 5. Wall panelling
 6. Roof/ ceiling panelling
 7. Backlit panelling
 8. Shower cubicles
 9. Partition panels
 10. Decorative walls
 11. Sliding/ folding doors and Many More...
- If you want to do something different and super premium, this is the way to go.

Size: 2400 x 1200 mm
1200 x 600 mm

Physical		Value
Specific Gravity		1.19
Water Absorbption		0.001
Optical		Value
Refractive Index		1.49
Total Light Transmittance		92
Haze		<0.5
Mechanical		Value
Tensile Strength	at Break	74
Tensile Elongation	at Break	5
Flexural Strength		120
Flexural Modulus		3100
Impact Strength ,Charpy	Notched	1.4
Thermal		Value
Coefficient of Linear Expansion		7×10^{-5}
Vicat Softening Temperature		104
Heat Deflection Temperature	1.82 Mpa, annealed	94
Electrical Property		Value
Surface Resistivity		$>10^{16}$
Volume Resistivity		$>10^{15}$
Insulation Resistance		$>10^{15}$
Dielectric Strength		20
Dielectric Constant	1 MHz	3.1
Other		Value
Mold Shrinkage		0.2-0.6
Hardness	Rockwell M	100

Product Information

- Thickness – 5mm
(8 mm Option Available Upon Request)
- Size – 2400mm X 1200mm
Size – Width Upto 1340mm &
Length Upto 4200mm Available Upon Request.

All Product Are For Internal Application Uses Only, We Don't Hold Any Guarantee For External & Outdoor Applications.